

# 22" LED FHD Monitor

MW3222-L



## Key Features



- True color display
- Resolution is up to at 1920×1080
- Wide viewing angle:170°(H)/ 160°(V)
- Specific menu design, which is simple to operate
- Support 7\*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language
- Built-in 3D COMB filter and 3D Noise Reduction
- 5ms response time for no motion blur, judder or ghosting
- High fidelity digital processing for a brilliant and vivid video
- Professional thermal design to extend equipment lifespan

## Specifications


Model	MW3222-L
Display	
Display Type	LED Backlight
Screen Size	21.5"
Aspect Ratio	16:9
Pixel Pitch(mm)	0.2482× 0.2482
Max Resolution	1920×1080
Brightness	250 cd/m <sup>2</sup>
Contrast	1000:1
Response Time	5ms
Color	16.7M
Viewing Angle	Horizontal 170°, Vertical 160°
Refresh Rate	60Hz
Interface	
Input	VGA ×1, HDMI×1
OSD	
Multi- Language	16 (English, France, Spanish, Portuguese, German, Italian, Dutch, Swedish, Finnish, Polish, Czech, Russia, Korea, Simplified Chinese, Traditional Chinese, Japanese )
Mounting	
VESA	100mm x 100mm
Wall-mounted Thread	4-M4 Threaded hole
General	
Power supply	DC 12V, 2A
Consumption	<20 W(on) <0.5 W(Standby)
Operation Temperature	0°C ~ 40 °C (32°F~104°F)
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C ~50°C (14°F~122°F)
Storage Humidity	10%~90% (No Condensation)
Dimension(W×H×D)	508.02mm × 392.87mm × 200mm (With Pedestal) 20"×15.47"×7.87"(With Pedestal)
Package(W×H×D)	566mm × 382mm × 166mm (22.28"×15.04"×6.54")
Weight	Net Weight:2.3Kg (5.07lb) Gross Weight:3.2Kg(7.05lb)
Accessory	
Standard	Adapter, Pedestal,Quick Guide
Optional	Hanging bracket(Model: HB-4022-E)

## Appearance

## Dimensions

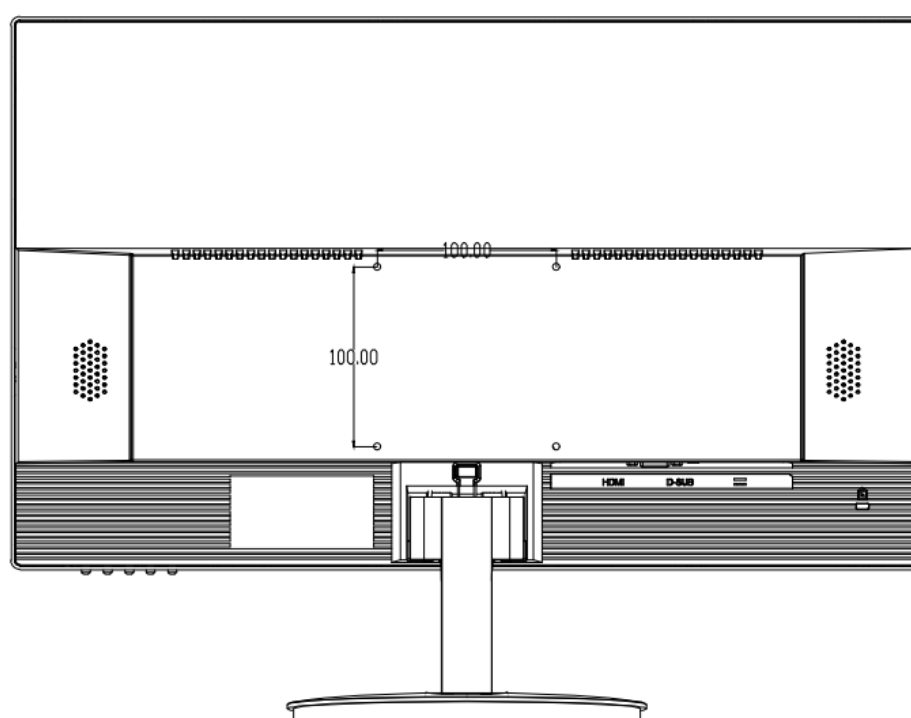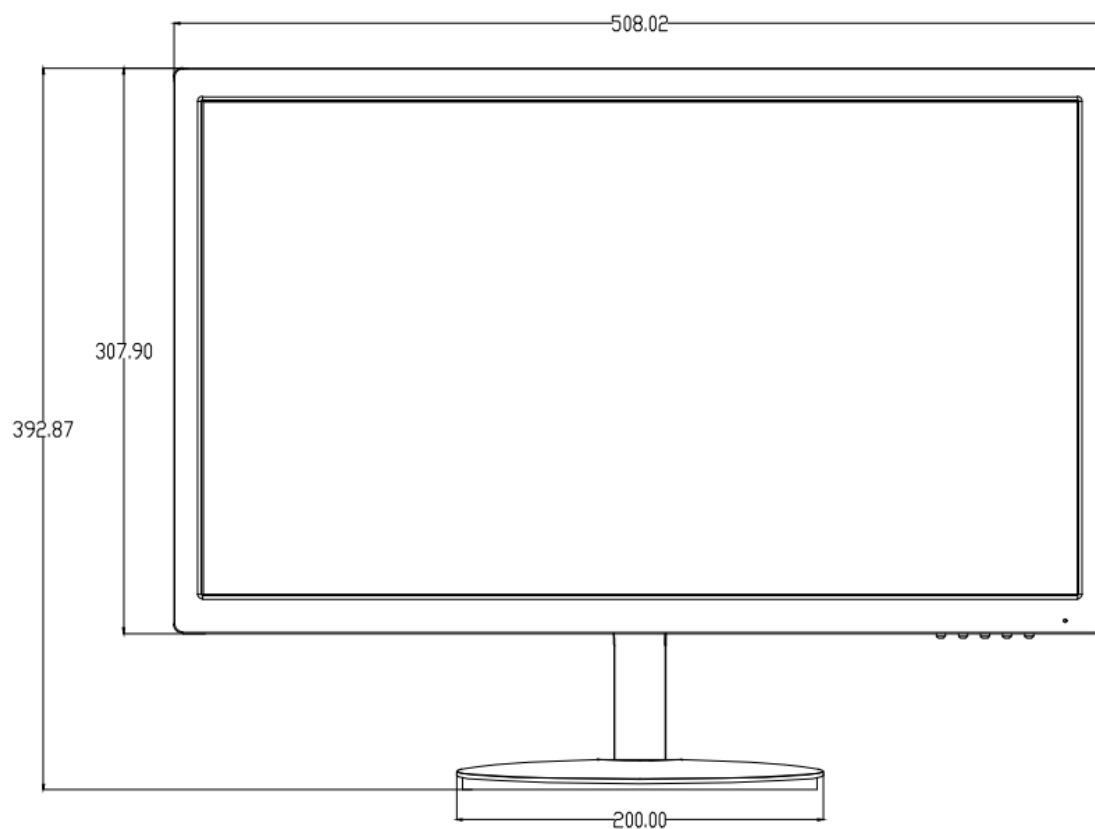

## Interfaces

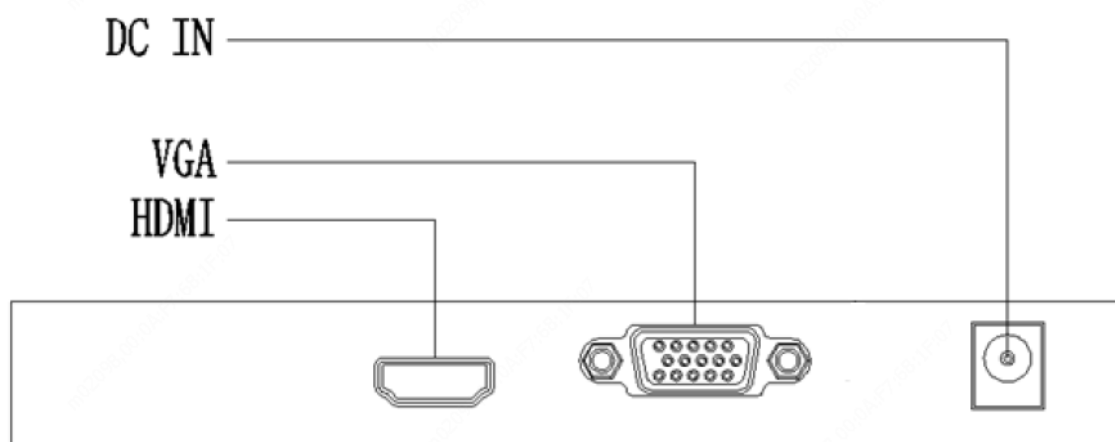**Zhejiang Uniview Technologies Co.,Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.