

## CAT6 NETWORK PATCH LEADS

### CAT6 UTP SLIMLINE PATCH LEADS - 250MHZ


The Category 6 enhanced UTP patch leads conform to the TIA/EIA-568-B specification. Patch leads are wired to the T568A pinout specification with tangle free latch do"wn plugs 30AWG. Slimline injection molded boots in various colours and lengths.



#### FEATURES:

- Produced by an ISO9001 and ISO14001 certified manufacturer
- 100% tested and component level certified by 3P, UL and ETL
- 30AWG
- High flexible bend radius
- Available in 9 colours
- Covered by lifetime warranty
- Perfect for cabling network data cabinets
- Perfect for cabling home structured wiring boxes
- Perfect for cabling high density patch environment
- Not compatible with HDBaseT connectivity
- Range: -20~60°C

#### T568A Cabling Pinout Specifications

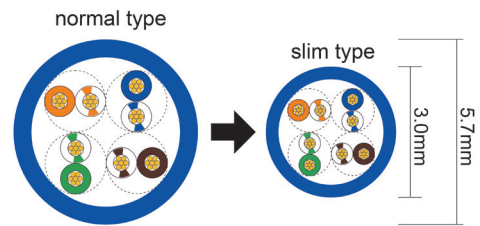

#### PRODUCT CODES

LENGTH	BEIGE	BLACK	BLUE	GREEN	GREY	RED	YELLOW	WHITE	PURPLE
0.25M	PLS-C6-0.25	PLSK-C6-0.25	PLSE-C6-0.25	PLSG-C6-0.25	PLSGY-C6-0.25	PLSR-C6-0.25	PLSY-C6-0.25	PLSW-C6-0.25	PLSP-C6-0.25
0.5M	PLS-C6-0.5	PLSK-C6-0.5	PLSE-C6-0.5	PLSG-C6-0.5	PLSGY-C6-0.5	PLSR-C6-0.5	PLSY-C6-0.5	PLSW-C6-0.5	PLSP-C6-0.5
0.75M	PLS-C6-0.75	PLSK-C6-0.75	PLSE-C6-0.75	PLSG-C6-0.75	PLSGY-C6-0.75	PLSR-C6-0.75	PLSY-C6-0.75	PLSW-C6-0.75	PLSP-C6-0.75
1M	PLS-C6-1	PLSK-C6-1	PLSE-C6-1	PLSG-C6-1	PLSGY-C6-1	PLSR-C6-1	PLSY-C6-1	PLSW-C6-1	PLSP-C6-1
1.25M	PLS-C6-1.25	PLSK-C6-1.25	PLSE-C6-1.25	PLSG-C6-1.25	PLSGY-C6-1.25	PLSR-C6-1.25	PLSY-C6-1.25	PLSW-C6-1.25	PLSP-C6-1.25
1.5M	PLS-C6-1.5	PLSK-C6-1.5	PLSE-C6-1.5	PLSG-C6-1.5	PLSGY-C6-1.5	PLSR-C6-1.5	PLSY-C6-1.5	PLSW-C6-1.5	PLSP-C6-1.5
2M	PLS-C6-2	PLSK-C6-2	PLSE-C6-2	PLSG-C6-2	PLSGY-C6-2	PLSR-C6-2	PLSY-C6-2	PLSW-C6-2	PLSP-C6-2
2.5M	PLS-C6-2.5	PLSK-C6-2.5	PLSE-C6-2.5	PLSG-C6-2.5	PLSGY-C6-2.5	PLSR-C6-2.5	PLSY-C6-2.5	PLSW-C6-2.5	PLSP-C6-2.5
3M	PLS-C6-3	PLSK-C6-3	PLSE-C6-3	PLSG-C6-3	PLSGY-C6-3	PLSR-C6-3	PLSY-C6-3	PLSW-C6-3	PLSP-C6-3