# **FCL0001 Cabinet Lock**

## **Installation Instructions**

The cabinet lock is designed to fit into cabinets and lockers with swing or sliding doors. The lock is interchangeable between the **POWER TO LOCK** (see FIG 1) and **POWER TO OPEN** (see FIG 2), two kinds of operation modes.

#### **Striker installation:**

SIDE ENTRY OF STRIKER (see FIG 3)

Use the 10mm distance indicated in Figure 4 to set

the distance from the interior side of the door to the

first screw hole of the lock.


FRONT ENTRY OF STRIKER (See FIG 3) Use the 37mm distance indicated in Figure 4 to set

the distance from the backside of the lock to the

mounting face of the striker.

## Power input 12 VDC or 24 VDC supply:

Note: There is no polarity on power input.

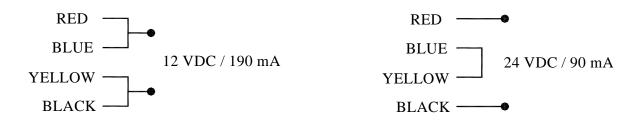




Figure 1: PTL

**Interchange between PTL and PTO:** 

- 1 Remove four screws from bottom
- 2 Remove the bottom case
- 3 Replace the wire in opposite side
- 4 Turn the bottom case 180° horizontally
- 5 Replace the bottom case
- 6 Replace the four screws.





Figure 2: PTO








Figure 3 Figure 4

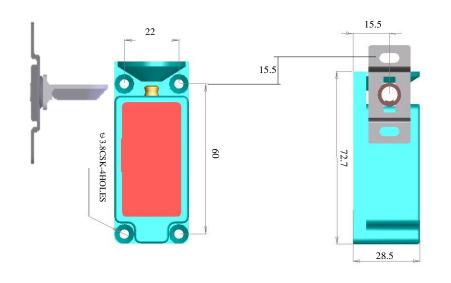





## **SLIDING DOORS**

FIT DOOR LOCK FIRST


## **SWING DOORS**



FIT DOOR LOCK FIRST



FIT STRIKER SECOND



FIT STRIKER SECOND